


ISSUE DATE:
 DATE D'ÉMISSION: 2009 06 29

 SUPERCEDES:
 REMPLACE: 2006 09 11

DWV SCH 40 ENVIRO-TITE PIPE / TUYAU DEE ECOLO SCH 40

SIZE GROSSEUR	OUTSIDE DIAMETER DIAMÈTRE EXTÉRIEUR		O.O.R. H.D.R. +/-	WALL THICKNESS ÉPAISSEUR MUR t		WEIGHT FACTOR FACTEUR DE POIDS	Ts MIN	MATERIAL MATÉRIEL
	MIN.	MAX.		MIN.	MAX.			
100 (4")	114.07	114.53	2.29	6.02	6.74	2.158	0.50	PVC

Specified Length 3.048 m (10 Feet / Pieds)
 Longueur spécifié 6.096 m (20 Feet / Pieds)

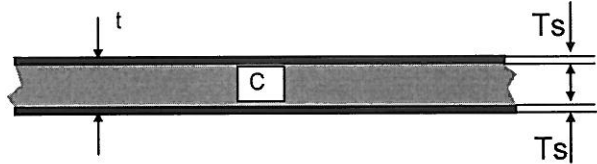


Perforations: see / voir PVC-8.0.6-b

WEIGHT, kg/m = SPECIFIC GRAVITY x WEIGHT FACTOR
 POIDS, kg/m = DENSITÉ RELATIVE x FACTEUR DE POIDS

BELL DIMENSIONS / DIMENSIONS D'EMBOITURE

A: 114.68 ± 0.23 mm
 B: 114.07 ± 0.23 mm
 C: 120.00 -0 / +5 mm Include / Include

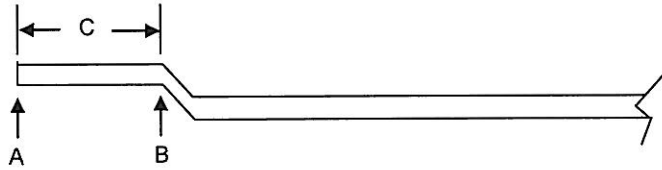

PRINTING CODE / CODE D'IMPRIMERIE:

4" / 100 mm Coex Enviro-Tite PVC DWV (SCH 40) Non pressure application only ASTM F1760 Contains Recycled PVC

→ -P- YYMMDDOER ## Made in Canada by IPEX INC.

- 1- -P-YYMMDDOER ## Production Date Code / Date de production (See / Voir page PC-0)
- 2- Colour of printing / Couleur d'imprimerie: Black or Blue / Noir ou bleu
- 3- Size of letters / Hauteur des lettres: 10 mm Ref.



IPEX
Committed to Excellence


PERFORATED BUILDING SEWER PIPE

New England Perforation Pattern


Short Form Specification

4" and 6" perforated PVC pipe shall be DR35 in 10 foot laying lengths with solvent bell ends. Pipe shall conform to requirements of ASTM D - 3034 and be certified to CSA B 182.1 and B 182.2.

Perforations shall consist of 2 rows of 1/2" (12.7mm) holes positioned at 120° radially on the pipe. Spacing between holes shall be 5" (125mm).



Hole size: 1/2" (12.7mm)
Spacing: 5" O.C. (125mm)

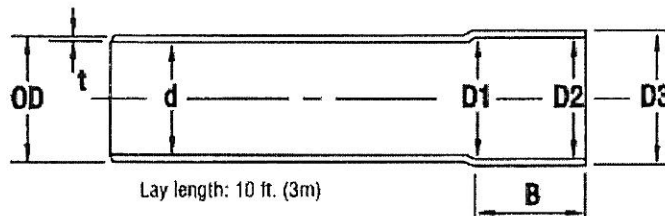

PRODUCT INFORMATION BULLETIN

IMPERIAL

Nominal Pipe Size	DR	Avg Outside Dia (O.D.) inches	Min Wall Thick (t) inches	d inches	D1 inches	D2 inches	D3 inches	Bell Depth B inches	Weight lb./100 ft.	Feet per Crate
4"	35	4.22	.13	3.95	4.21	4.24	4.50	1.73	107	630
6"	35	6.28	.19	5.89	6.27	6.30	6.68	2.95	232	280

METRIC

Nominal Pipe Size	DR	Avg Outside Dia (O.D.) mm	Min Wall Thick (t) mm	d mm	D1 mm	D2 mm	D3 mm	Bell Depth B mm	Weight kg/m	Meters per Crate
100mm	35	107.1	3.3	100.4	106.9	107.6	114.2	43.9	1.6	192
150mm	35	159.4	4.9	149.7	159.3	160.0	169.7	74.9	3.0	85

Perforated pipe is also available from 8" (200mm) to 36" (900mm).

IPEX Inc.

6810 Invader Crescent, Mississauga, Ontario L5T 2B6
Telephone (905) 670-7676 · Toll free (800) 463-9572 · Fax (905) 670-1512