


Light Duty Riser Clamp Fig. 008G

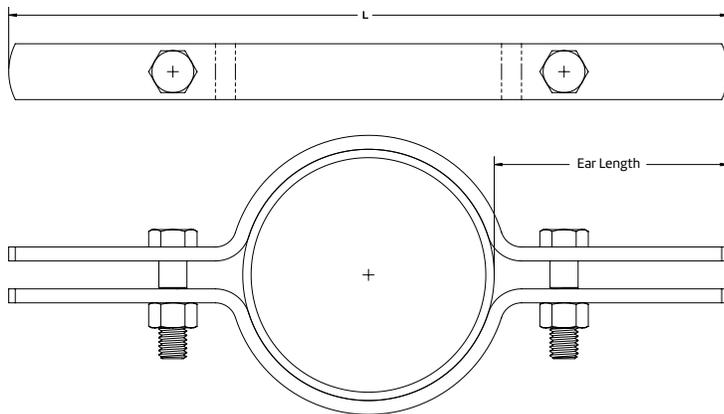

Size Range: ½" through 6" NPS

Material: Carbon steel

Finish: Electro-Galvanized

Service: Recommended for the suspension of stationary pipe.

Maximum Temperature: 450° F

Approvals: MSS SP-58 (Type-8)

Installation: Clamp is to be fitted and bolted below a coupling, hub or welded lugs on steel pipe. Bolt torques should be per industry standards. Clamp is designed for standard steel pipe O.D. and this must be considered in sizing the riser for other types of piping.

Ordering: Nominal pipe size and figure number.

Notes:

- For U.S. domestic product see Fig. 261 Riser Clamp.



Fig. 008G: Dimensions (in) Loads (lbs)

| Pipe Size | Max Load | Length | Ear Length |
|-----------|----------|---------------------------------|------------|
| ½ | 150 | 5 ¹³ / ₁₆ | 2½ |
| ¾ | 150 | 6 ¹ / ₁₆ | 2½ |
| 1 | 150 | 6 ⁵ / ₁₆ | 2½ |
| 1¼ | 150 | 6 ¹¹ / ₁₆ | 2½ |
| 1½ | 150 | 6 ⁷ / ₈ | 2½ |
| 2 | 150 | 7 ³ / ₈ | 2½ |
| 2½ | 150 | 7 ⁷ / ₈ | 2½ |
| 3 | 200 | 8½ | 2½ |
| 4 | 250 | 9½ | 2½ |
| 6 | 480 | 11 ⁵ / ₈ | 2½ |

| PROJECT INFORMATION | APPROVAL STAMP |
|---------------------|-------------------|
| Project: | Approved |
| Address: | Approved as noted |
| Contractor: | Not approved |
| Engineer: | Remarks: |
| Submittal Date: | |
| Notes 1: | |
| Notes 2: | |