

# Lead Free Automatic Balancing Valve



## Automatic Flow Limiter, Union, 600 WOG




TAF

### Features

- +/- 5% accuracy
- Two pressure / temperature (PT) ports
- 0.5 GPM is the default flow cartridge selected if not specified
- Direction of flow labeled on valve body

### Pressure and Temperature Rating

- 600 WOG
- 325°F Max

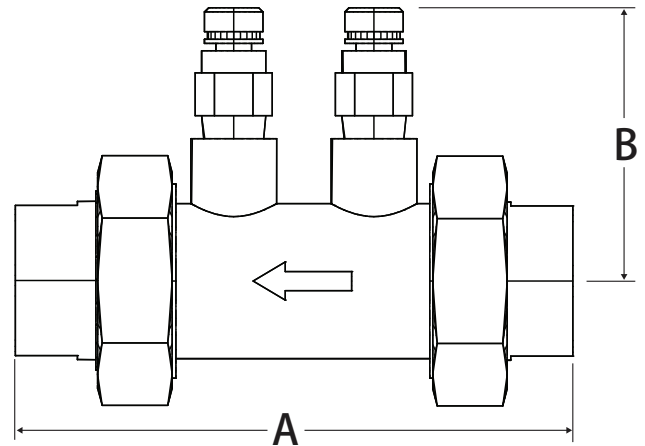

### Material Specifications

Part	Materials
Body	Lead Free Brass - CW510L
Union Nut (2)	Brass - CW617N
Tail Piece (2)	Lead Free Brass - CW510L
Temperature Test Port	Brass - CW617N
Balancing Cartridge	316 Stainless Steel

### Dimensions & Pricing

Part No.	Size	A	B
TAF-AFF	1/2"	4.58	2.38
TAF-BFF	3/4"	4.68	2.38
TAF-CFF	1"	6.24	2.38

### GPM Ordering Guide

Cartridge	Pressure Range		GPM							
	2-32	0.5	1.00	2.00	3.00	4.00	4.50	6.00	7.00	8.00
C2-L	2-32	0.5	1.00	2.00	3.00	4.00	4.50	6.00	7.00	8.00
C2-H	5-60	9.00	10.00	11.00	12.00	-	-	-	-	-



**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).