


Lead Free Brass Ball Valve



2 Piece • Full Port • Press x Hose Connection • 600 WOG •
Stainless Steel Ball and Stem • with Cap and Chain



P-100HPG

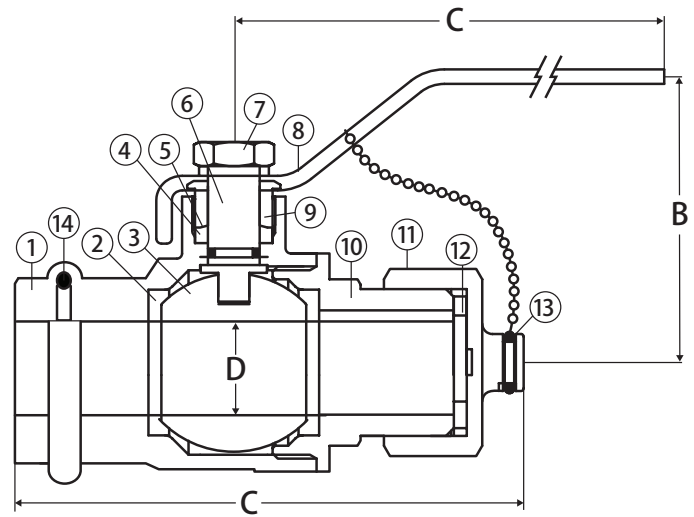

Features

- Dezincification resistant brass
- Gland follower and single o-ring stem design
- Blow-out proof stem
- Cap and chain for easy drain & hose connection
- Heavy steel chain
- 100% leak tested
- IAPMO Certified - NSF 372
- Wetted surfaces contain less than .25% lead content

Approvals

- Conforms to IAMPO PS 117

Pressure/Temperature Rating

- 250 WOG
- Max. 250° F



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and lead, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Material Specifications

| No. | Part | Materials |
|-----|----------------|--------------------------|
| 1 | Body | Lead Free Brass - C46500 |
| 2 | Seat | PTFE |
| 3 | Ball | 304 Stainless Steel |
| 4 | Packing | PTFE |
| 5 | Stem O-Ring | NBR |
| 6 | Stem | 304 Stainless Steel |
| 7 | Handle Nut | Steel - Chrome Plated |
| 8 | Handle | Steel - Chrome Plated |
| 9 | Packing Nut | Brass - C37700 |
| 10 | End Connection | Lead Free Brass - C46500 |
| 11 | Cap Nut | Brass - C37700 |
| 12 | Gasket | EPDM |
| 13 | Chain | Steel - Chrome Plated |
| 14 | O-Ring | EPDM |

Dimensions

| Part No. | Size | A | B | C | D |
|----------|------------------|------|------|------|------|
| 100-673G | 1/2" x 3/4" Hose | 3.38 | 1.81 | 3.46 | 0.59 |
| 100-674G | 3/4" x 3/4" Hose | 3.74 | 2.09 | 4.29 | 0.75 |