




Socket Weld Full Coupling  
**3000# Forged Steel**  
Inches / Pounds

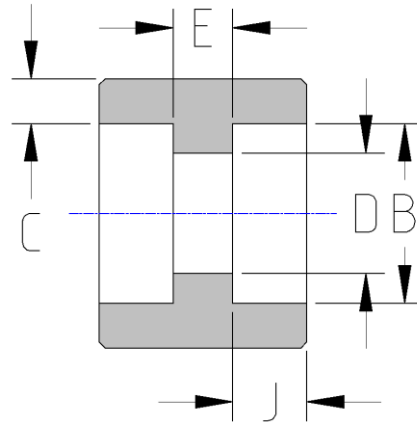

Nominal pipe size	B Max. Min.	C Avg. Min.	D Max. Min.	E Tolerance	J Min.	Approximate Weight (in Pounds)
1/8	0.440 0.420	0.125 0.125	0.299 0.239	0.25 0.06	0.38	0.10
1/4	0.575 0.555	0.149 0.130	0.394 0.334	0.25 0.06	0.38	0.12
3/8	0.710 0.690	0.158 0.138	0.523 0.463	0.25 0.12	0.38	0.18
1/2	0.875 0.855	0.184 0.161	0.652 0.592	0.38 0.12	0.38	0.25
3/4	1.085 1.065	0.193 0.168	0.854 0.794	0.38 0.12	0.50	0.39
1	1.350 1.330	0.224 0.196	1.079 1.019	0.50 0.16	0.50	0.71
1 1/4	1.695 1.675	0.239 0.208	1.410 1.350	0.50 0.16	0.50	0.84
1 1/2	1.935 1.915	0.250 0.218	1.640 1.580	0.50 0.16	0.50	1.10
2	2.426 2.406	0.273 0.238	2.079 2.037	0.62 0.75	0.75	1.83
2 1/2	2.931 2.906	0.345 0.302	2.529 2.409	0.62 0.75	0.75	2.44
3	3.560 3.535	0.375 0.327	3.128 3.008	0.62 0.75	0.75	3.52
4	4.570 4.545	0.421 0.368	4.086 3.966	0.75 0.75	0.75	5.58

**\*ASME B16.11**