




Caps
SCHEDULE 160
Inches / Pounds

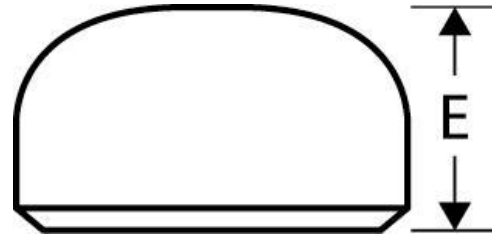

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Center to End (A)	Approximate Weight (in Pounds)
1/2	0.84	0.464	0.188	1.00	0.30
3/4	1.05	0.612	0.219	1.00	0.30
1	1.32	0.815	0.250	1.50	0.40
1 1/4	1.66	1.160	0.250	1.50	0.50
1 1/2	1.90	1.338	0.281	1.50	0.60
2	2.38	1.687	0.344	1.75	1.30
2 1/2	2.88	2.125	0.375	2.00	1.80
3	3.50	2.624	0.438	2.00	2.90
4	4.50	3.438	0.531	3.00	5.90
5	5.56	4.313	0.625	3.50	10
6	6.63	5.187	0.719	4.00	15
8	8.63	6.813	0.906	5.00	31
10	10.75	8.500	1.125	6.00	57
12	12.75	10.126	1.312	7.00	95
14	14.00	11.188	1.406	7.50	200
16	16.00	12.812	1.594	8.00	297
18	18.00	14.438	1.781	9.00	360
20	20.00	16.062	1.969	10.00	420
22	22.00	17.750	2.125	10.00	-
24	24.00	19.312	2.344	12.00	535

** Dimensions conform to ASME B16.9 & material conforms to ASTM SA-234 Grade B.*