




Straight Tees
SCHEDULE 160
Inches / Pounds

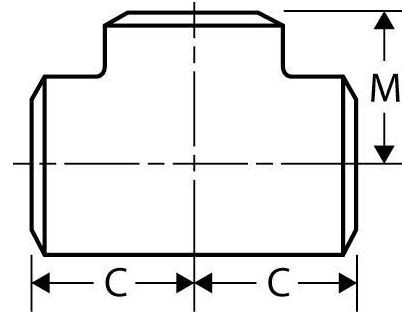

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Center To End (C)	Center To End (M)	Approximate Weight (in Pounds)
1/2	0.84	0.464	.188	1.00	1.00	—
3/4	1.05	0.612	.219	1.13	1.13	0.7
1	1.32	0.815	.250	1.50	1.50	1.1
1 1/4	1.66	1.160	.250	1.88	1.88	2.1
1 1/2	1.90	1.338	.281	2.25	2.25	3.0
2	2.38	1.687	.344	2.50	2.50	4.5
2 1/2	2.88	2.125	.375	3.00	3.00	7.0
3	3.50	2.624	.438	3.38	3.38	11.5
4	4.50	3.438	.531	4.13	4.13	21.5
5	5.56	4.313	.625	4.88	4.88	37.0
6	6.63	5.187	.719	5.63	5.63	63.0
8	8.63	6.813	.906	7.00	7.00	114.0
10	10.75	8.500	1.125	8.50	8.50	265.0
12	12.75	10.126	1.312	10.00	10.00	389.0
14	14.00	11.188	1.406	11.00	11.00	561.0
16	16.00	12.812	1.594	12.00	12.00	768.0
18	18.00	14.438	1.781	13.50	13.50	1345.0
20	20.00	16.062	1.969	15.00	15.00	1536.0
22	22.00	17.750	2.125	16.50	16.50	—
24	24.00	19.312	2.344	17.00	17.00	2601.0

** Dimensions conform to ASME B16.9 & material conforms to ASTM SA-234 Grade B.*